

NEW PRODUCTS 2026


ELEKTRA

MCS (Modular Control System)

A NEW APPROACH TO LIGHTING CONTROL.

Modular control system for LED lights.
Separate driver and various function modules for easy lighting control via external switches, remote controls, wired or wireless sensors, as well as via smart home systems, including voice control.

- Low profile
- High-quality design
- Easy setup
- Convenient operation
- Expandable

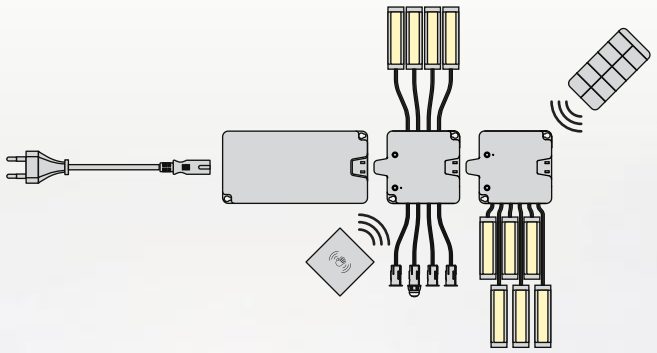

matter

LD 8222

CLEAN LINES. UNIFORM LIGHT.

Discreet 70x70 mm edge length, just under 8 mm high: The luminaire takes a back seat visually and, thanks to a light-emitting surface that covers nearly the entire surface , produces a calm, uniform light pattern . Available as a surface-mounted or recessed version.

- Clean design
- Full-surface light emission
- Recessed version for 58 mm bore diameter
- Surface-mounted version for adhesive installation



MIX 3,000 K 4,000 K 2,700–6,400 K

CRI Color Rendering Index (CRI) > 90

24V Suitable for 24 V systems

Neon Flex 6x6

LIGHTING DESIGN WITHOUT A PROFILE.

Easily integrate striking light lines into furniture. Flexible, freely cut to size, with solder-free quick connectors.

- Silicone sheath
- Waterproof IP67
- Clamp mounting
- Can be separated at any point




MIX 3,000 K 4,000 K 2,700–6,400 K

CRI Color Rendering Index (CRI) > 90

24V Suitable for 24 V systems

Neon Flex Strip 6x6 with Collar



Neon Flex Strip 6x6



Free Cut

LD 8502 – CUSTOM-MADE MOUNTED LIGHT – FLEXIBLY CUT TO LENGTH, ELEGANTLY INTEGRATED.

A delicate surface-mounted light with a high-quality appearance. Can be cut to any length. Ideal for retrofitting on furniture

- 10x10 mm aluminum profile
- Can be cut to any length
- power supply and end caps



LD 8503 – INSTALLED WITH MILLIMETER PRECISION

Just as flexible as the surface-mount version, but designed for installation inside furniture.

- 11.5 x 10 mm aluminum profile
- Milling dimensions: 10x10 mm
- Can be cut to any length
- power supply and end caps



24V Suitable for 24 V systems

MIX 3,000 K 4,000 K 3,000–6,500 K

CRI Color Rendering Index (CRI) > 90

LD 8504

OVAL-SHAPED MOUNTED LIGHT

Modern design. High light output. Optionally available with a sensor switch for on/off/dimming.

- 121x62x37 mm
- Angled light output
- Sensor switch (optional)



4,000 K

CRI Color Rendering Index (CRI) > 90

12V Suitable for 12 V systems

LD 8160

LIGHTING WITH A DISTINCTIVE PROFILE.

Recessed luminaire with an asymmetrical profile. Depending on the installation orientation and viewing angle, the light output of the is either shielded or accentuated.

- Visible linear lighting
- Asymmetrical profile
- Horizontal or vertical



MIX 3,000 K 4,000 K 2,700–6,400K

CRI Color Rendering Index (CRI) > 90

24V Suitable for 24 V systems

1-Channel Control

CONTROL UNIT WITH DIMMING AND COLOR TEMPERATURE SETTINGS FOR MIX LUMINAIRES

- 1-Channel Control
- 2-button remote control
- Dimming level and color temperature adjustable



Power Boxes

OUTLETS / SWITCHES / LIGHTING CONTROLS IN ONE BOX

Various versions available in silver or black:

- Outlet/ LED Lighting Control
- Double Outlet
- Switch and Outlet
- Each includes a USB-C port




LD 8320 (Proof of Concept)

ILLUMINATED STORAGE SYSTEM.

The LD 8320 system offers a high degree of design flexibility. Various shelf depths and finishes are available. Using the integrated MCS control system and Tunable White, the three light sources—at the top, bottom, and center—can be controlled individually. This allows the lighting to be adapted to any room design.

- Aluminum profile, black-coated
- Integrated MCS lighting control
- Widths up to 320 cm



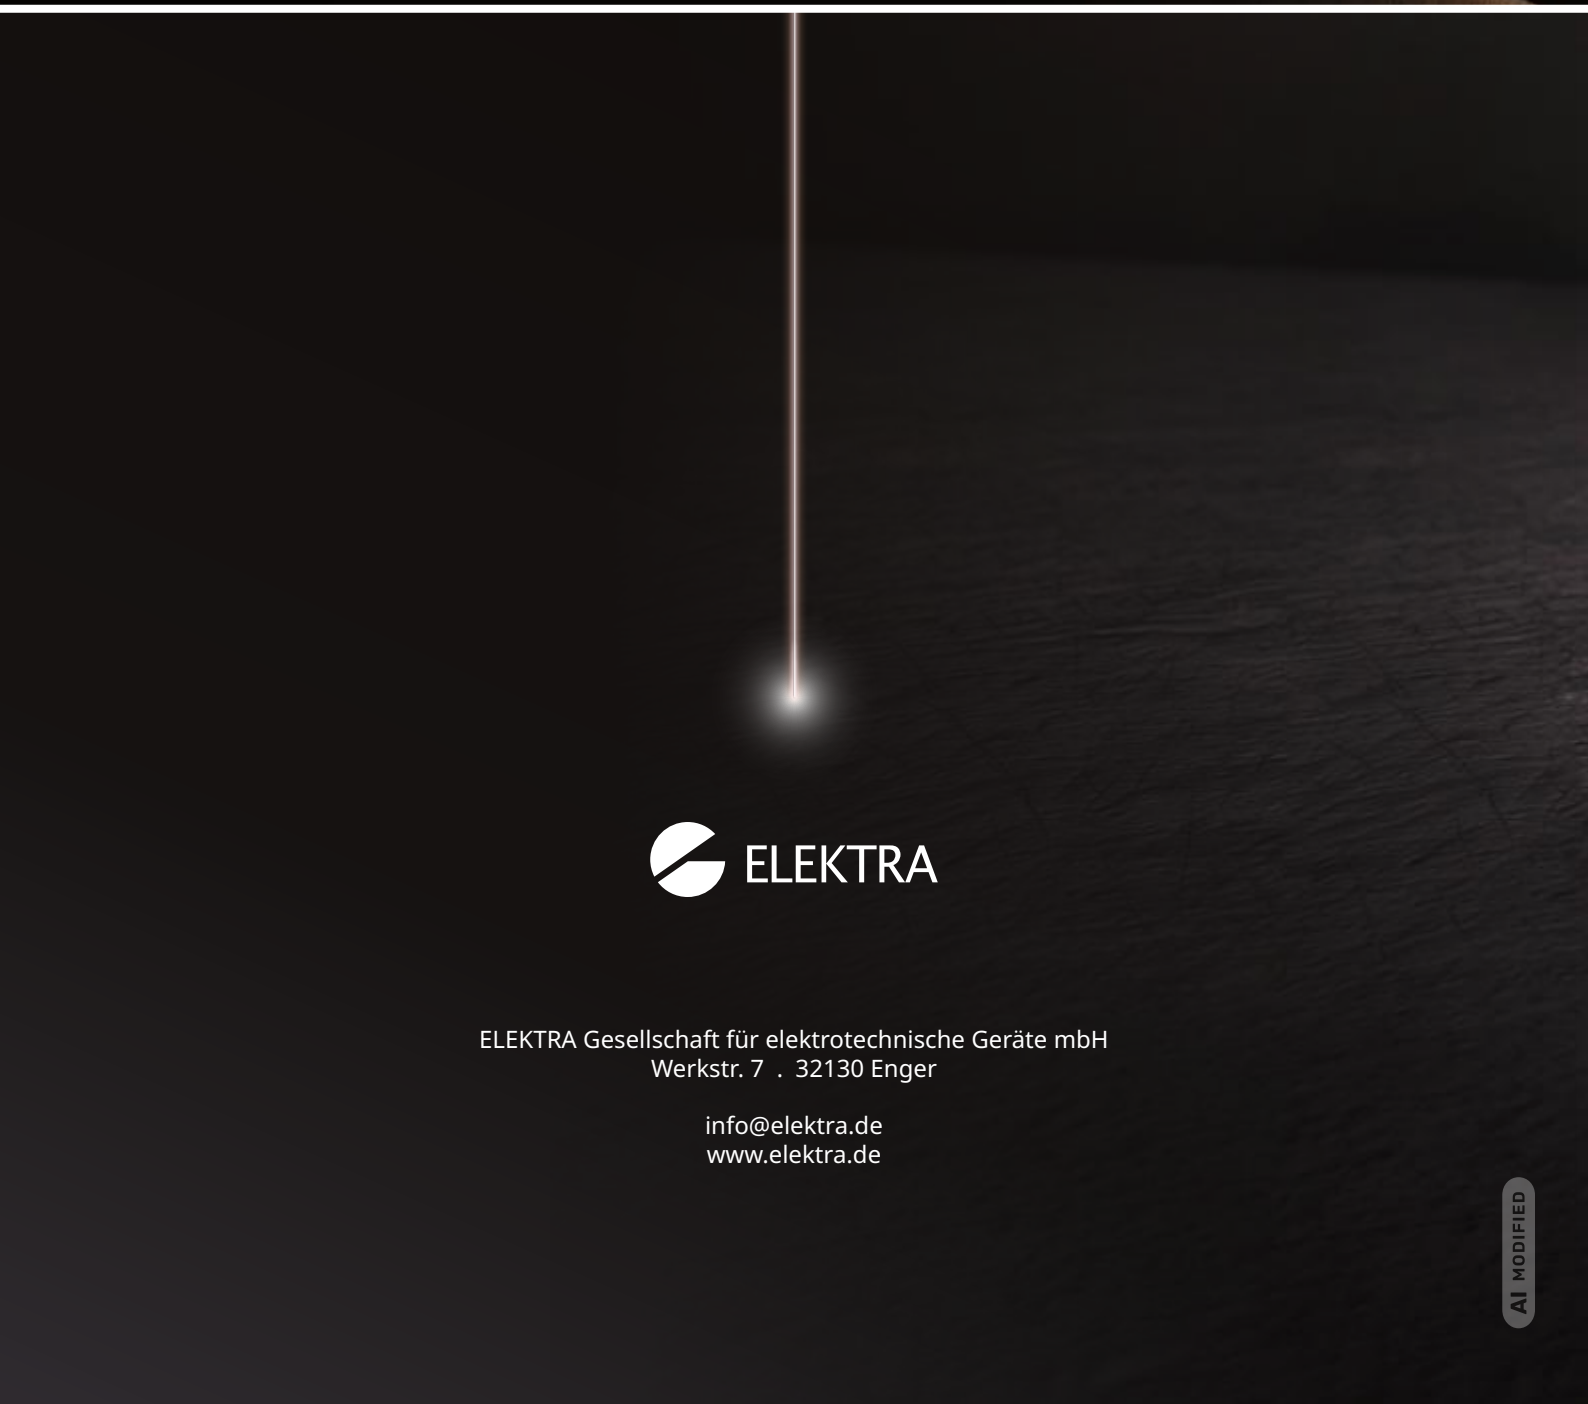

ELEKTRA

ELEKTRA Gesellschaft für elektrotechnische Geräte mbH
Werkstr. 7 . 32130 Enger

info@elektra.de
www.elektra.de

AI MODIFIED