



LED DRIVER CONSTANT VOLTAGE CV 24100-L

COMPACT PERFORMANCE.


The CV 24100-L series reliably supplies LED systems with 24 V and is ideally suited for use in furniture and interior design. Its slim design allows for easy integration even in tight spaces. Built-in protection features ensure safe and long-lasting operation.



CV 24100-L

Operating voltage	Pri.: 220-240 V / 50-60 Hz Sec.: 24 V
Rated power	See chart
Primary lead	3000 mm
Connector	See chart
Secondary lead	130 mm
Socket/Distributor	See chart
Protection	Short circuit Overload Overvoltage
No-load protection	Yes
Dimming function	No
Protection	IP 20
Protection class	II

DIMENSIONS

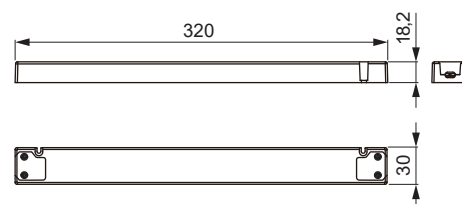

Attention!

Sold unassembled without caps!

Note:

Connection cable with Euro flat plug. Connection cable with 6-port mini distributor (green).

PRODUCTS

Art. No.	Rated power (W)	Primary	Secondary	ta (°C)	tc (°C)	λ	Weight (g)
539 740 70	100	Unassembled, without cap	Unassembled, without cap	-20...+40	90	0,95	175
539 740 11	100	Euro flat plug	6-port mini distributor, green	-20...+40	90	0,95	330