



LD 8124 X2

DELICATE LINEAR LIGHT FIXTURE

Modern lighting technology that adapts flexibly to a variety of room and furniture layouts. With adjustable lengths, high-quality light, and a continuously adjustable color temperature, it offers a versatile solution for both atmospheric and functional lighting. Its understated design blends harmoniously into a wide range of applications, and its shallow installation depth opens up new possibilities for design.


PRODUCT FEATURES

Operating voltage	24 V
Profile	Aluminum
Diffuser	Opal white
Power	15 W/m / see chart
LED type	SMD-TWIN
Light colour	2700-6400 K
Luminous flux	Yes
Connection cable	2-pole, 24AWG
Connection system	ESP
Mounting	Clamp mounting
Protection	IP20
Protection class	III






Note:

Thanks to the shallow installation depth of just 7.5 mm (including mounting clips), lights can be installed opposite each other in a 16 mm side panel. This can be achieved either by milling pockets on both sides or by creating a continuous milled groove.

ILLUMINANCE

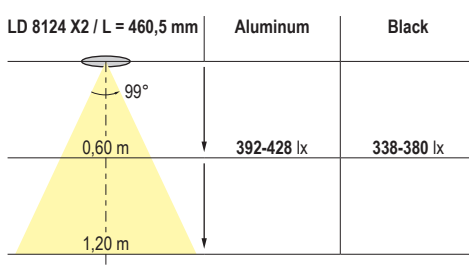

LIGHT DISTRIBUTION

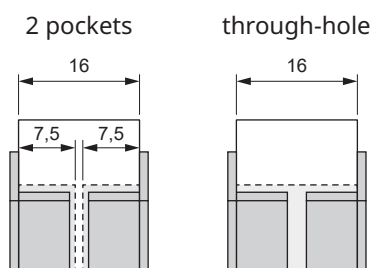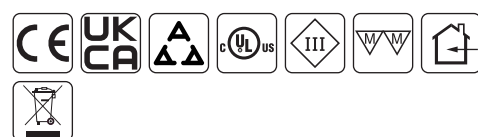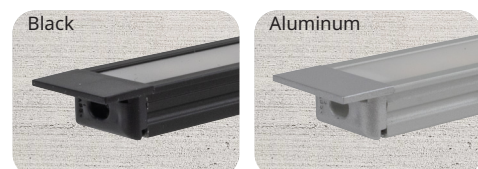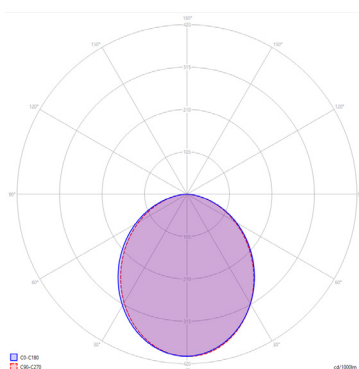


PRODUKTE

Art. No.	Power (W)	Colour	Length (mm)	Lumen (lm)
530 518 51	3,7	Black	260,5	-
530 518 52	5,1	Black	360,5	-
530 518 53	5,9	Black	410,5	-
530 518 54	6,6	Black	460,5	424-462
530 518 55	8,0	Black	560,5	-
530 518 56	11,0	Black	760,5	-
530 518 57	12,5	Black	860,5	-
530 518 58	14,0	Black	960,5	-
530 518 59	16,9	Black	1160,5	990-1102
530 518 01	3,7	Aluminum	260,5	-
530 518 02	5,1	Aluminum	360,5	-
530 518 03	5,9	Aluminum	410,5	-
530 518 04	6,6	Aluminum	460,5	482-527
530 518 05	8,0	Aluminum	560,5	-
530 518 06	11,0	Aluminum	760,5	-
530 518 07	12,5	Aluminum	860,5	-
530 518 08	14,0	Aluminum	960,5	-
530 518 09	16,9	Aluminum	1160,5	-

Other lengths and light colors are available on request.

DIMENSIONS

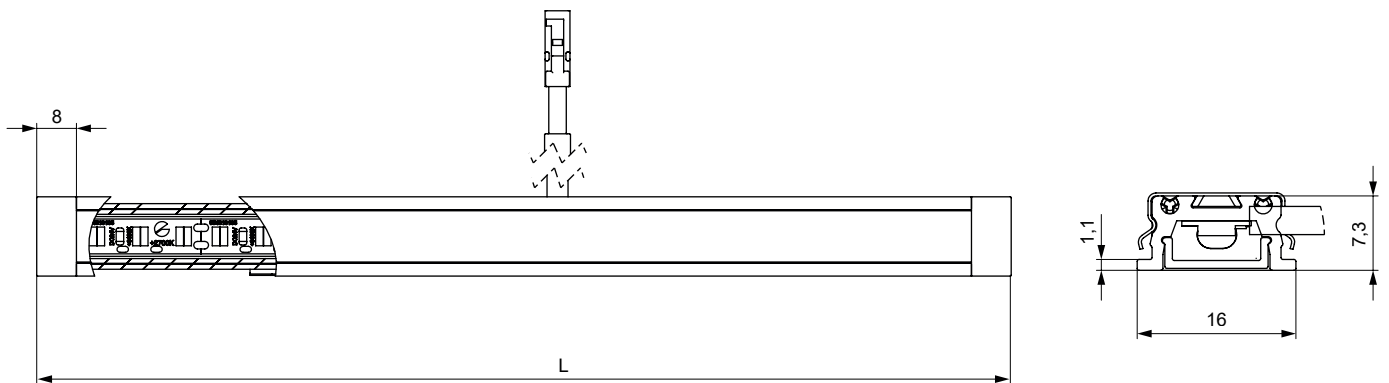

MOUNTING

